

INDUSTRIAL BURNERS ON REHEAT FURNACES

yeten combustion

industrial burners & control equipments



MSB® High & Medium Velocity Burners

- Capacities: 50 - 5000 kW
- Turndown Ratio: 1/50
- Oxygen Enrichment: Max. 24 %
- λ : 0.7



MSB® Flat Flame Burners

- Capacities: 50 - 600 kW
- Turndown: 1/50



OMD 1700 Oxygen Analyzers


- Measuring Range: 0 - 25 % O₂
- Voltage: 24 V DC, 3A
- Output Signal: 4-20 mA, 0-10 V
- Accuracy: 1 %



Gas Trains



Gas & Air Flow Meters

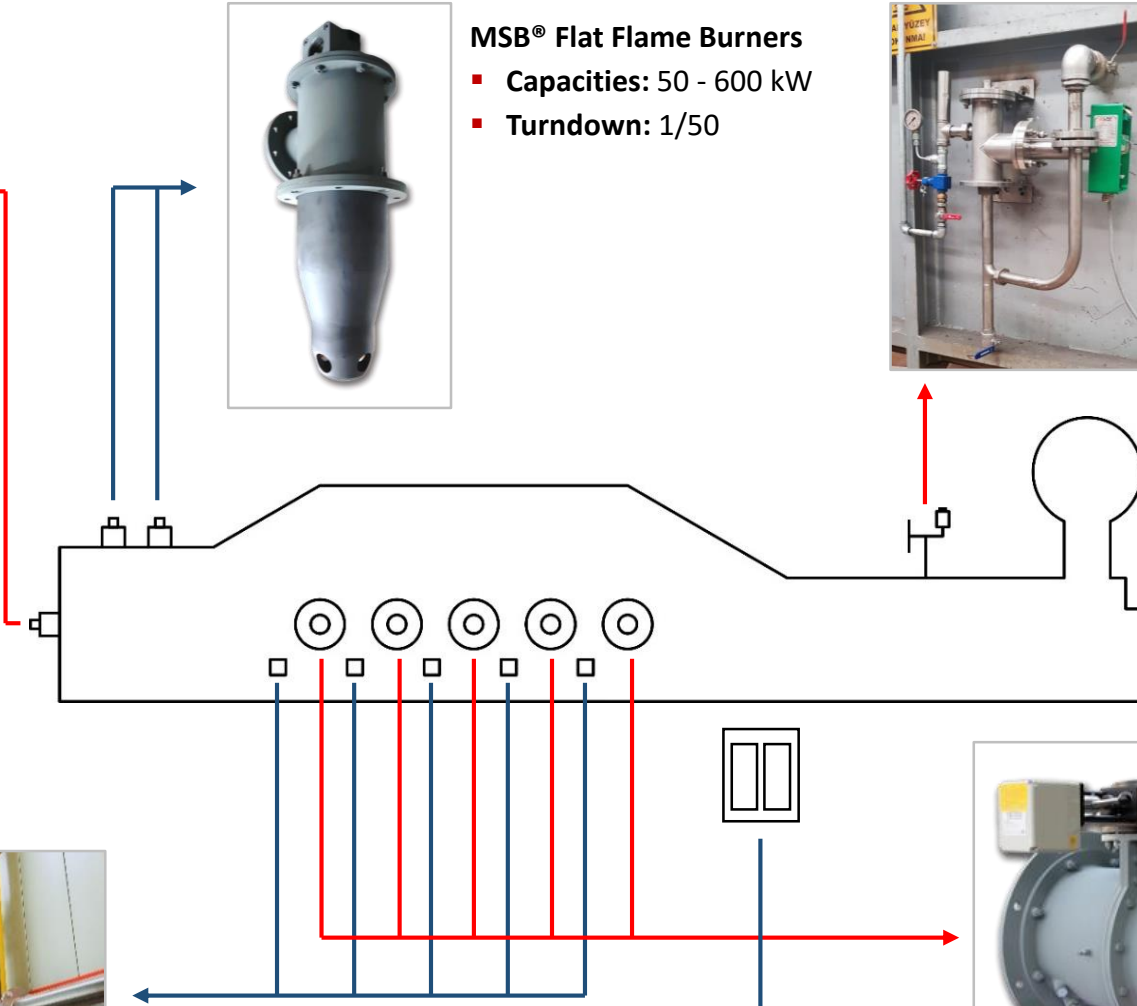

Control Cabinets due to
EN 746 - 2 Safety Standard




Mildflame® Flameless - Oxygen Enriched Burners

- Capacities: 550 - 5000 kW
- NO_x Level: 60 ppm
- Oxygen Enrichment: Max. 29 %
- Operation with 5 % and Less Excess Air

INDUSTRIAL BURNERS ON LADLE HEATING SYSTEMS

MSB® High & Medium Velocity Burners

- Capacities: 50 - 5000 kW
- Turndown Ratio: 1/50
- Oxygen Enrichment: Max. 24 %
- λ : 0.7



NHG Industrial Gas Burners

- Capacities: 400 - 28000 kW



Control Cabinets due to
EN 746 - 2 Safety Standard



Gas Trains

